



MONOPOD/PULLEY KIT P/N 796530

User Information

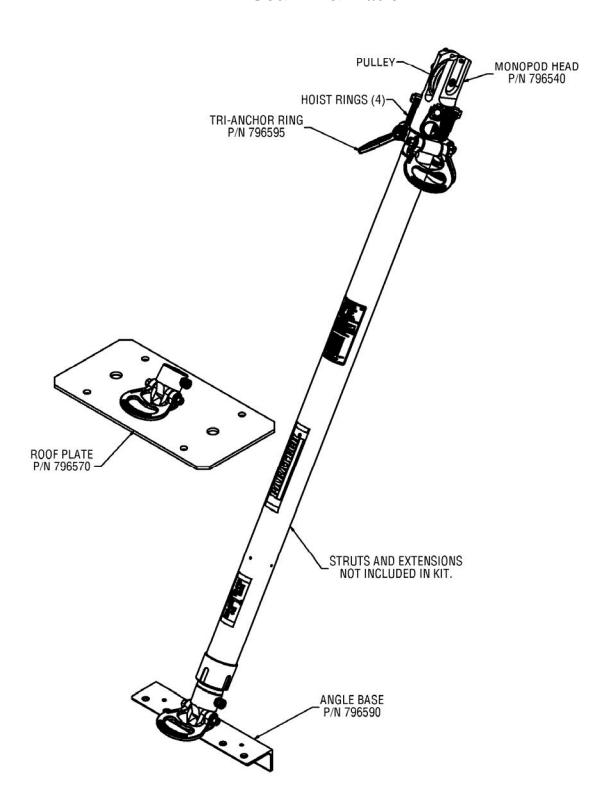

USER INFORMATION



BEFORE USE

The techniques employed in the proper and safe use of this equipment may only be learned through **PERSONAL** instruction received from an instructor who is well-qualified in all phases of vertical rope work. Such instruction will include an evaluation of your comprehension of and ability to perform the tasks required to safely and efficiently use this equipment.

Never attempt to use this kit until you have received such instruction and are believed competent by your instructor.

INSPECTION FOR USE

Visually and by touch, inspect the Monopod Head for cracks, distortion, corrosion, scratches or gouges, sharp edges or rough areas that might abrade a rope and normal rotation of the anodized aluminum sheave. Check screws and nuts to make sure they have not loosened. Compare this pulley with a new model if necessary to determine its condition. Remove it from service if there is any doubt about its safety or serviceability.

SUGGESTED ROPE USE

Use a maximum Life Safety Rope size of ½ inch. Do not use wire or cable with this pulley.

DURING USE

Do not exceed 1000 lbs.(4:1 safety factor) per hoist ring when loading Monopod Head. Use only on 610 Longshore strut. Be sure to immobilize the base plate securely to prevent accidental and sudden strut movement.

MAINTENANCE AFTER USE

Carefully clean and dry the Monopod Head to remove all dirt or foreign material and moisture. Minor sharp edges on the pulley may be smoothed with fine, abrasive cloth before cleaning. No lubrication is required. Store in a clean dry place.

REMOVAL FROM SERVICE

The Monopod Head should be removed from service if it has been dropped, or exposed to heat sufficient to alter its surface appearance, or if distortion of any part is apparent, or if any cracks are apparent, or if it has scratches or gouges of more than a superficial nature.

ADDITIONAL INFORMATION

Additional information regarding this type of equipment can be found in the following publications:

NFPA 1500, Standard on Fire Department Occupational Safety and Health Program NFPA 1983, Standard on Fire Service Life Safety

Rope and system Components

RECORDS

It is suggested that the user of this Monopod Kit keep a permanent record listing the date and results of each usage inspection. Particular attention should be paid to the Monopod Head and integrated pulley. Such record should show as a

minimum inspection for all of the following conditions:

- Cleanliness
- Dryness
- Freedom from scratches, gouges and sharp edges
- Freedom from corrosion
- Freedom from distortion
- Proper sheave rotation
- Axle nuts and/or screws properly tightened
- User Information sheet present

USE OF THIS USER INFORMATION SHEET

It is suggested that this User Information sheet be retained in a permanent record after it is separated from the kit and that a copy of it be kept with the kit.

It is suggested that the user refer to this User Information sheet before and after each use of the kit.

WARNING

- YOU COULD BE KILLED
 OR SERIOUSLY INJURED
 IF YOU DO NOT READ
 AND UNDERSTAND THE
 USER INFORMATION
 BEFORE USING THIS
 PIECE OF EQUIPMENT
- SPECIAL TRAINING AND KNOWLEDGE ARE REQUIRED TO USE THIS EQUIPMENT
- YOU MUST THOROUGHLY READ AND UNDERSTAND ALL MANUFACTURER'S INSTRUCTIONS BEFORE USE
- USE AND INSPECT THIS EQUIPMENT ONLY IN ACCORDANCE WITH THESE INSTRUCTIONS





P.O. Box 1000, 1025 Lambrecht Road, Frankfort, Illinois 60423 Tel: (815) 469-3911 Toll Free: (800) 435-9358 Fax: (815) 469-7748 E-mail: Paratech@paratech.us Website: www.paratech.us



